


Boot

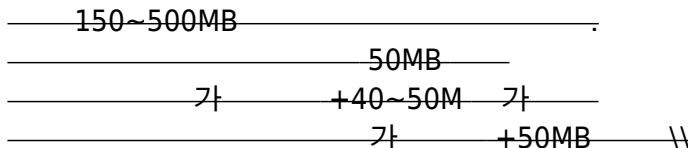

```
grub-mkconfig -o /boot/grub/grub.cfg
```

```
boot ( "root=")
"root="
```

Home

```
X 가
```

```
# Add an "alert" alias for long running commands. Use like so:
# sleep 10; alert
if [ "$(lsb-release -s -i)" == "Linuxmint" ]; then
    alias alert='notify-send --urgency=low -i "$( [ $? = 0 ] && echo
terminal || echo error)" "$(history|tail -n1|sed -e
'\''s/^s*[0-9]+\+\s*//;s/[;&]\s*alert$/'\'')'
fi

## For LFS user
#if [ "$(lsb_release -c -s)" == "Bae Chanyil" ]; then
#    if [ -f /etc/bashrc ]; then
#        source /etc/bashrc
#    fi

#    if [ -d ~/.profile.d ]; then
#        for config in ~/.profile.d/*; do source "$config"; done
#    fi
#endif

## For Gentoo Linux user
if [ "$(lsb-release -s -i)" == "Gentoo" ]; then
    if [ -f /var/db/repos/gentoo/metadata/timestamp.chk ]; then
        LastSync=$(cat
/var/db/repos/gentoo/metadata/timestamp.chk)"
```

```
        echo -e "Last Sync Date: ${Green}$LastSync${Color_Off}"  
    fi  
fi
```

From:
<https://gamu.kr/dokuwiki/> -

Permanent link:
<https://gamu.kr/dokuwiki/homeserverwithdebian/partition?rev=1715333844>



Last update: **2024/05/10 09:37**